

MV-ID3013PM

1.3 MP Smart Code Reader



CE

RoHS

Introduction

MV-ID3013PM smart code reader can read different types of codes with reading speed up to 84 codes/sec. It adopts Hikrobot's deep learning algorithm to process images with good robustness, and can recognize various complex codes.

Key Feature

- Adopts built-in deep learning algorithm to read codes with good robustness.
- Adopts CMOS global shutter sensor to provide high quality images.
- Adopts multiple IO interfaces for input and output signals.
- Adopts 14 LED lamps to provide light source.
- Supports polarized and non-polarized modes.
- Adopts 2 LED aiming lamps for easy installation and code aiming.
- Indicators on device display device status and code reading results.


Applicable Industry

Consumer electronics, food and beverage, pharmaceutical, semiconductor, automobile, etc.

Available Model

- 6 mm focal length: MV-ID3013PM-06M-WBN
- 12 mm focal length: MV-ID3013PM-12M-WBN
- 14.8 mm focal length: MV-ID3013PM-15M-WBN

Dimension

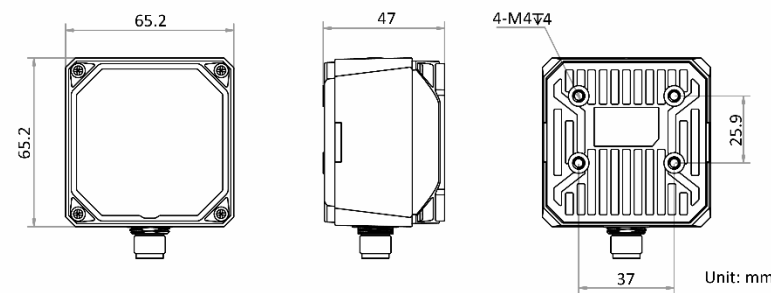

Specification

| Model | MV-ID3013PM-06M-WBN | MV-ID3013PM-12M-WBN | MV-ID3013PM-15M-WBN |
|-------------------------------|---|---------------------|---------------------|
| Performance | | | |
| Symbologies | 1-dimensional codes: Code 39, Code 93, Code 128, CodaBar, EAN 8, EAN 13, UPCA, UPCE, ITF 14, ITF 25, Matrix 25, MSI, China Post, Code 11 and Industrial 25 | | |
| | 2-dimensional codes: QR Code, Data Matrix | | |
| | Stack codes: PDF 417 | | |
| Max. frame rate | 60 fps | | |
| Max. reading speed | 84 codes/sec | | |
| Sensor type | CMOS, global shutter | | |
| Pixel size | 4 μm × 4 μm | | |
| Sensor size | 1/2.7" | | |
| Resolution | 1280 × 1024 | | |
| Exposure time | 35 μs to 1 sec | | |
| Gain | 0 dB to 15 dB | | |
| Mono/color | Mono | | |
| Communication protocol | SmartSDK, TCP Client, TCP Server, Serial, FTP, Profinet, Ethernet/IP, MELSEC, ModBus, Fins, SLMP | | |
| Electrical feature | | | |
| Data interface | Fast Ethernet | | |
| Digital I/O | 17-pin M12 connector provides power and I/O, including non-isolated input (LineIn 0/1/2) × 3, non-isolated output (LineOut 0/1/2) × 3, RS-232 input × 1, RS-232 output × 1. Device trigger via pressing button on top supported. | | |
| Power supply | 24 VDC | | |
| Max. power consumption | Approx. 20 W@24 VDC (light source enabled) | | |
| Mechanical | | | |
| Focal length | 6 mm (0.2") | 12 mm (0.5") | 14.8 mm (0.6") |
| Lens mount | M12-mount, mechanical autofocus supported. | | |
| Lens cap | Half polarized front cover by default. Polarized and transparent ones are optional. | | |
| Light source | White light by default. Red/blue/IR light is optional. | | |
| Indicator | Power indicator (PWR), network indicator (LNK), status indicator (STS), result indicator (OK/NG) | | |
| Dimension | 65.2 mm × 65.2 mm × 47 mm (2.6" × 2.6" × 1.9") | | |
| Weight | Approx. 280 g (0.6 lb.) | | |
| Ingress protection | IP67 (under proper installation of waterproof lens cap) | | |
| Temperature | Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F) | | |
| Humidity | 20% to 95% RH, non-condensing | | |
| General | | | |
| Client software | IDMVS | | |
| Certification | CE, RoHS | | |

HIKROBOT

Hangzhou Hikrobot Co., Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.
Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.